


## ISUH Series

IF/ L-Band & SHF, Switch Units, rack mounted with user interface.

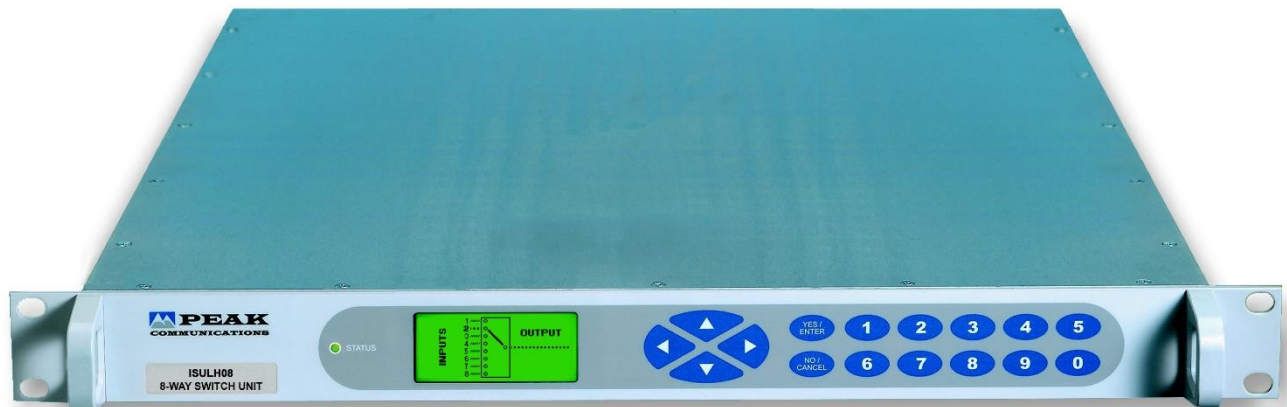

### High Grade Switch Products;

<b>ISULH0401</b>	4:1, 4in, 1out (or <b>0104</b> ; 1in, 4out), IF/ L-Band	<b>ISUSH0401</b>	4:1, 4in, 1out (or <b>0104</b> ; 1in, 4out), SHF
<b>ISULH0801</b>	8:1, 8in, 1out (or <b>0108</b> ; 1in, 8out), IF/ L-Band	<b>ISUSH0801</b>	8:1, 8in, 1out (or <b>0108</b> ; 1in, 8out), SHF
<b>ISULH1201</b>	12:1, 12in, 1out (or <b>0112</b> ; 1in, 12out), IF/ L-Band	<b>ISUSH1201</b>	12:1, 12in, 1out (or <b>0112</b> ; 1in, 12out), SHF
<b>ISULH1601</b>	16:1, 16in, 1out (or <b>0116</b> ; 1in, 16out), IF/ L-Band	<b>ISUSH1601</b>	16:1, 16in, 1out (or <b>0116</b> ; 1in, 16out), SHF
<b>ISULH2401</b>	24:1, 24in, 1out (or <b>0124</b> ; 1in, 24out), IF/ L-Band	<b>ISUSH2401</b>	24:1, 24in, 1out (or <b>0124</b> ; 1in, 24out), SHF
<b>ISULH3201</b>	32:1, 32in, 1out (or <b>0132</b> ; 1in, 32out), IF/ L-Band	<b>ISUSH3201</b>	32:1, 32in, 1out (or <b>0132</b> ; 1in, 32out), SHF






For other switching configurations & frequency ranges, please contact the factory

The 19-inch, 1RU rack mounted **ISUH series** of IF/ L-Band & SHF switch units from Peak Communications are designed to provide high quality signal switching, primarily for satellite earth station signal selection (monitoring) and signal distribution applications. They include latching switches which maintain the RF path configuration in the event of a power failure, rather than pin diode switches which are common in lower grade designs.

The **ISUH series** units are mains powered and are constructed of high grade components to give the ultimate isolation performance.

These units are offered with a range of optional enhancements and Peak is happy to customise the units to meet specific needs (please contact the Peak team directly to discuss any non-standard requirements).

### Peak Features

-  Latching switches to maintain RF path configuration in the event of power failure
-  High isolation
-  Compact; up to 16:1 (16 inputs, 1 output) or 1:16 (1 input, 16 outputs) in a single 1RU chassis
-  Optional monitoring, dual PSU's, Ethernet remote control etc.
-  Customising available



## ISUH series – Typical Specification

### Switch Performance

Switch type	Co-axial, latching
Option 13;	Co-axial, failsafe
Ways	up to 16-way (16:1 or 1:16) available in 1RU 24-way (24:1 or 1:24) available in 2RU 32-way (32:1 or 1:32) available in 3RU
Frequency	9kHz to 3GHz
IF/L-Band; SHF;	up to 31GHz available, please contact factory
<i>Note: for performance degradation above 3GHz please contact the factory</i>	
Insertion loss	1dB ±1dB nom
Gain flatness	±0.75dB across full band (up to ±1.5dB for 32:1) ±0.25dB across any 40MHz
Input power	+50dBm max.
Isolation	80dB typ. (between any two input ports)
Input return loss	15dB
Output return loss	15dB

### RF Interfaces

Input connections	SMA (f), 50Ω (K-Type above 20GHz)
Option 1a;	BNC (f), 50Ω
Option 1b;	N-Type (f), 50Ω (up to 8-way only in 1RU)
Option 1c;	BNC (f), 75Ω
Output connections	SMA (f), 50Ω (K-Type above 20GHz)
Option 1d;	BNC (f), 50Ω
Option 1e;	N-Type (f), 50Ω (up to 8-way only)
Option 1f;	BNC (f), 75Ω

### DC Blocking (Option 8)

Provides DC blocking facility for switch inputs or outputs

### Output 'Monitor' (Option 2a, 2b)

Connected directly to front panel (Option 2a) or rear panel (Option 2b) to provide an appropriately terminated monitor port.

Level	-20dBc ±3dB
-------	-------------

*Note: connection type, impedance and level offered will be identical to the main rear panel interfaces, unless otherwise requested.*

### Electronically Variable Attenuation (Option 10)

Attenuation range	30dB
Step size	0.1dB or 0.5dB
Control	Electronically variable via local front panel & remote control

*Note: attenuator typically fitted to common output. Input power, noise figure & flatness degraded with this option, please contact factory for details.*

### Failsafe Switching (Option 13)

Failsafe switching to default back to primary RF path in the event of a power failure.

### Terminating switching (Option 14)

As standard the unselected inputs/ outputs are unterminated, this option provides termination for all unselected interfaces.

### Mechanical

Width	19", standard rack mount
Height	Typically up to 16-way in 1U (1.75"), up to 24-way in 2RU (3.5"), up to 32-way in 3RU (5.25")
Depth	400mm, plus connectors
Construction	Aluminium chassis
Weight	Approx. 2kgs (4.4lbs)

### Environmental

Operating temp	-10°C to +50°C
EMC	EN55022-part B & EN50082-1
Safety	EN60950

### Power supply

Voltage	90-264VAC
Frequency	47-63Hz
Power	30 Watts max.
Option 7;	Redundant PSU; provides a 1+1 redundant power supply configuration with separate prime power inputs

### Control System Interface


Remote Control	RS232/RS485 port
Option 9;	Ethernet; embedded web server & SNMP network management support
Discrete 'alarms interface'	PSU failure Switch position error

### Options

- 1a) Input's BNC (f), 50Ω connections
- 1b) Input's N-Type (f), 50Ω connections (8:1/ 1:8 max. in 1RU)
- 1c) Input's BNC (f), 75Ω connections
- 1d) Output's BNC (f), 50Ω connections
- 1e) Output's N-Type (f), 50Ω connections
- 1f) Output's BNC (f), 75Ω connections
- 2a) Output front panel monitor port
- 2b) Output rear panel monitor port
- 5) Spare port terminations
- 7) Redundant power supplies
- 8) DC blocking for combiner inputs or splitter outputs
- 9) Ethernet interface with embedded web server & SNMP
- 10a) Electronic attenuator, 0-30dB (0.5dB steps), at IF/ L-Band
- 10b) Electronic attenuator, 0-30dB (0.1dB steps), at IF/ L-Band
- 13) Failsafe switches, defaulting back to primary RF path during power failure
- 14) Termination of unselected interfaces.

*Note: the addition of options can modify the typical specification, for details please consult the factory*

## Rear Panel View (8:1 selection switch unit shown)

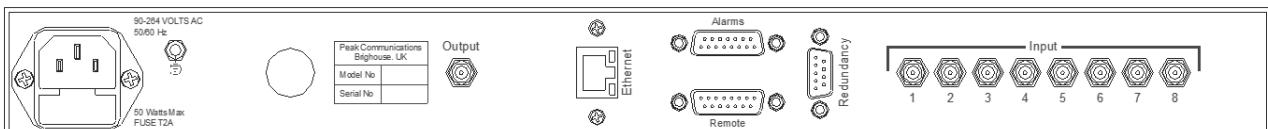

Peak Communications reserves the right to alter the specifications of this equipment without prior notice. ISULH-170718.  
Peak Communications Ltd., Unit 1, The Woodvale Centre, Woodvale Road, Brighouse, West Yorkshire, HD6 4AB, U.K.

Tel; +44 (0)1484 714200 Sales; +44 (0)1484 714229 Fax; +44 (0)1484 723666 Email; [sales@peakcom.co.uk](mailto:sales@peakcom.co.uk) Web; [www.peakcom.co.uk](http://www.peakcom.co.uk)