

DLAH200

Dual, Modular, 'Hot-swappable' Variable Gain, Line Amplifier with optional 1+1 redundancy



Available Line Amplifier modules for the DLAH200 chassis;

MLAH70	IF 70±20MHz & 140±40MHz frequencies
MLAHL1450	L-Band 950-1450MHz frequencies
MLAHL1750	L-Band 950-1750MHz frequencies
MLAHL2150	L-Band 950-2150MHz frequencies
MLAHS2400	S-Band 2.0-2.4GHz frequencies
MLAHC4200	C-Band 3.4-4.2GHz receive frequencies
MLAHC6725	C-Band 5.85-6.725GHz transmit frequencies
MLAHKu1275	Ku-Band 10.7-12.75GHz receive frequencies
MLAHKu1450	Ku-Band 13.75-14.5GHz transmit frequencies
MLAHD1840	DBS-Band 17.3-18.4GHz transmit frequencies

For other 'non-standard' frequency requirements, please contact the factory.






For equivalent remote mountable units, please see PLA series datasheet.

The 19 inch 1U rack mounted **DLAH200** chassis unit is designed to accept two Line Amplifier modules. Modules can be inserted/ replaced in the unit from the rear without the need to remove power or disturb the other channel in any way.

The unit incorporates a graphics display module, membrane keyboard and features a clear and intuitive control and configuration menu fully utilising the unique graphics display.

The **DLAH200** chassis units are mains powered (redundant power supplies offered as standard) and are constructed of high grade components to give the ultimate Gain flatness and stability performance.

Peak Features

-  High gain flatness and stability performance
-  Supports variable attenuator and 'chassis mute' options
-  Amplifier module low current alarm monitoring
-  Redundant Power Supplies with dual mains input
-  Integral 1+1 Redundancy option for module switching



DLAH200 Chassis - Typical Specification

Mechanical

Width	19", standard rack mount
Height	1U (1.75")
Depth	534mm (21"), plus connectors
Construction	Aluminium chassis
Weight	Approx. 9kgs (20lbs)

Environmental

Operating temp	0°C to +50°C
EMC	EN 55022 part B & EN 50082-1
Safety	EN 60950

Power Supply (2off in redundant configuration)

Voltage	90-264VAC
Frequency	47-63Hz
Total power	50 Watts typ.

Control System Interface

Local interface	Graphics display & keypad
Remote control	RS232/ 485 port
Option 9;	Ethernet; embedded web server & SNMP network management support
Alarms	PSU fail Amplifier current detection

Integral 1+1 'Module' Redundancy (Option 6)

Connections	SMA (f), 50Ω
Switching speed	<150ms (from fault to switch completion)
Switch isolation	>60dB input to output
Option 13;	Output 'chassis mute' facility (>80dB)
Cables	Includes high grade rear panel links

Note; the connection to the internal redundancy circuitry is made via SMA (f) RF links on the rear panel, this allows for by-pass wiring should the need arise. High grade co-axial linking cables are provided.

10MHz Reference Pass-through (Option 5)

Allows 10MHz reference fed into the unit (multiplexed onto input connection) to 'pass-through' to output (L-Band only).	
Option 5a	for use with option 6, fitted between system input and output connections
Option 5b	for use without option 6, fitted between module input and output connections

DLAH Options

- 5a) 10MHz reference pass-through (with option 6)
- 6) Integral 1+1 redundancy module switching
- 9) Ethernet interface with embedded web server & SNMP, replaces RS232/485 port
- 13) Output 'chassis mute' facility (only available with option 6)

Notes; the addition of options can modify the typical specification, for details please consult the factory



MLAH Modules - Typical Specification

Input

MLAH70;	50-200MHz
MLAHL1450;	950-1450MHz
MLAHL1750;	950-1750MHz
MLAHL2150;	950-2150MHz
MLAHS2400;	2.0-2.4GHz
MLAHC4200;	3.4-4.2GHz
MLAHC6725;	5.85-6.725GHz
MLAHKu1275;	10.7-12.75GHz
MLAHKu1450;	13.75-14.5GHz
MLAHD1840;	17.3-18.4GHz
Connector	SMA (f), 50Ω
Option 1a;	N-Type (f), 50Ω
Option 1c;	BNC (f), 50Ω (<2150MHz only)
Option 1e;	BNC (f), 75Ω (<2150MHz only)
Option 1g;	F-Type (f), 75Ω (<2150MHz only)

Notes; some connector options may lower the overall unit performance. F-Type performance cannot be guaranteed.

Return loss 16dB

Output

Connector	SMA (f), 50Ω
Option 1b;	N-Type (f), 50Ω
Option 1d;	BNC (f), 50Ω (<2150MHz only)
Option 1f;	BNC (f), 75Ω (<2150MHz only)
Option 1h;	F-Type (f), 75Ω (<2150MHz only)

Notes; some connector options may lower the overall unit performance. F-Type performance cannot be guaranteed.

Return loss 18 to 22dB (frequency dependent)

RF Performance

Gain	20dB min
Option 4a;	30dB nom
Option 4b;	40dB nom
Option 7;	Adjustment; 30dB range, 0.1 or 0.5dB steps (IF/ L-Band only)

Note; for other gain requirements please contact the factory

Gain flatness ±0.25dB (bandwidths <500MHz)
±0.5dB (bandwidths <800MHz)
±1dB (bandwidths <1200MHz)

Active directivity 22dB typ., 20dB min
RF input power -10dBm max (no load, no damage)
TOIP +25dBm (+20dBm >2150MHz)
1dB output GCP +13dBm (+8dBm >2150MHz)

Note; for higher GCP options please contact the factory.

Noise figure 7 to 9dB (frequency dependent, at min atten)

Monitor Ports (Option 2)


Option 2a;	Input monitor
Option 2b;	Output monitor
Connector	SMA (f), 50Ω, on rear panel
Level	-20dBc ±3dB

MLAH Options

- 1a) N-Type (f), 50Ω MLA module input connector
- 1b) N-Type (f), 50Ω MLA module output connector
- 1c) BNC (f), 50Ω MLA module input connector
- 1d) BNC (f), 50Ω MLA module output connector
- 1e) BNC (f), 75Ω MLA module input connector
- 1f) BNC (f), 75Ω MLA module output connector
- 1g) F-Type (f), 75Ω input interface connection
- 1h) F-Type (f), 75Ω output interface connection
- 2a) -20dBc input monitor on rear panel
- 2b) -20dBc output monitor on rear panel
- 4a) higher gain to 30dB nom
- 4b) higher gain to 40dB nom
- 5b) 10MHz reference pass-through
- 7) Variable gain, 30dB range, 0.1 or 0.5dB steps, IF/ L-Band

Notes; the addition of options can modify the typical specification, for details please consult the factory

Rear panel view

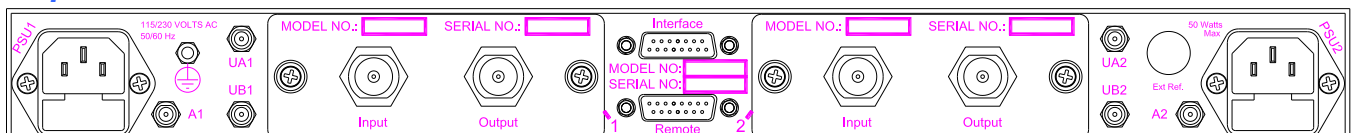

Peak Communications reserves the right to alter the specifications of this equipment without prior notice. DLAH200-140716.

Peak Communications Ltd., Unit 1, The Woodvale Centre, Woodvale Road, Brighouse, West Yorkshire, HD6 4AB, U.K.

Tel; +44 (0)1484 714200 Sales; +44 (0)1484 714229 Fax; +44 (0)1484 723666 Email; sales@peakcom.co.uk Web; www.peakcom.co.uk