

## ISI/ L/ R & ICI/ L Series

### Reference/ IF/ L-Band/ SHF, Active & Passive Splitter/ Combiner Units, Rack Mounted



#### High Grade Splitter Products;

<b>ISL02A</b>	L-Band, active, 2-way
<b>ISL04A/P</b>	L-Band, active or passive, 4-way
<b>I2SL04A/P</b>	L-Band, active or passive, dual-channel, 4-way
<b>I4SL04P</b>	L-Band, passive, quad-channel, 4-way
<b>ISL08A/P</b>	L-Band, active or passive, 8-way
<b>ISL12A/P</b>	L-Band, active or passive, 12-way
<b>ISL16A/P</b>	L-Band, active or passive, 16-way
<b>ISL24A/P</b>	L-Band, active or passive, 24-way
<b>ISL32A/P</b>	L-Band, active or passive, 32-way
<b>ISL64A/P</b>	L-Band, active or passive, 64-way

Other multi-channel combinations available, please consult the factory  
 For IF (70/ 140MHz) versions of the above please state ISI04, ICI04 etc  
 For Reference (10MHz) versions of the above splitters please state ISR04 etc

#### High Grade Combiner Products;

<b>ICL02A</b>	L-Band, active, 2-way
<b>ICL04A/P</b>	L-Band, active or passive, 4-way
<b>I4CL04P</b>	L-Band, passive, quad-channel, 4-way
<b>ICL08A/P</b>	L-Band, active or passive, 8-way
<b>ICL12A/P</b>	L-Band, active or passive, 12-way
<b>ICL16A/P</b>	L-Band, active or passive, 16-way
<b>ICL24A/P</b>	L-Band, active or passive, 24-way
<b>ICL32A/P</b>	L-Band, active or passive, 32-way
<b>ICL64A/P</b>	L-Band, active or passive, 64-way

#### High Grade Splitter & Combiner Products (please consult the factory for other combinations);

<b>ISCL02A</b>	L-Band, active, 2-way splitter and 2-way combiner in a single chassis
<b>ISCL04A</b>	L-Band, active, 4-way splitter and 4-way combiner in a single chassis
<b>ISCL08A</b>	L-Band, active, 8-way splitter and 8-way combiner in a single chassis
<b>ISCL04P</b>	L-Band, passive, 4-way splitter and 4-way combiner in a single chassis
<b>ISCL08P</b>	L-Band, passive, 8-way splitter and 8-way combiner in a single chassis

For splitting/ combining at other frequencies, including SHF-Bands please contact the factory.  
 For equivalent units with full user interface, remote control and digital attenuation please see ISLH & ICLH series datasheets.  
 For equivalent remote mount units, please contact the factory.

The 19-inch, 1U rack mounted **ISI/L/R series** of reference/ IF/ L-Band splitter units and **ICI/L series** of IF/ L-Band combiner units from Peak Communications are designed to provide high quality signal splitting/ combining, primarily for satellite earth station applications.

The **ISI/L/R & ICI/L series** units are mains powered and are constructed of high grade components to give the ultimate gain flatness, noise figure and return loss performance. Both active and passive versions are available, with optional internal amplifier redundancy for active versions.

Peak is happy to customise the units to meet specific needs (including SHF versions) so please contact the Peak team directly to discuss any non-standard requirements.

#### Peak Features



- High gain flatness and low noise figure
- Compact with up to 16-way in a single 1RU chassis
- Amplifier high & low current alarm monitoring
- Manually variable attenuator options for local control of gain
- Optional monitoring, dual PSU's, redundant amp's, BUC/ LNB power, referencing, DC blocking



## IS/L/R, IC/L series – Typical Specification

### Active Reference/ IF/ L-Band Splitter Performance (IS/L/RxxA)

Ways (xx)	02, 04, 08, 12-way available in 1RU 16, 24-way available in 2RU 32, 64-way available in 3RU
-----------	---

Notes: spare ports will require termination (see option 5). For 12-way and above, please consult the factory for performance.

#### Frequency

Reference (ISRxxA);	10MHz
IF (ISLxxA series);	50-180MHz
L-Band (ISLxxA);	850-2150MHz
Gain	0dB ±1dB nom.
Gain flatness	±0.75dB across full band (±1.5dB for 32, 64-way) ±0.25dB across any 40MHz

#### TOIP

1dB input GCP +1.5dBm

Note: for higher GCP options please contact the factory

Noise figure	6dB
Isolation	22 to 25dB typ. (between any two output ports)
Input return loss	14dB
Output return loss	20dB

### Active IF/ L-Band Combiner Performance (IC/LxxA)

Performance as above unless stated below;

Noise figure	20dB
Isolation	22 to 25dB typ. (between any two input ports)
Input return loss	20dB
Output return loss	14dB

### Passive Reference/ IF/ L-Band Splitter/ Combiner Performance (IS/L/RxxP & IC/LxxP)

Ways (xx)	04, 08, 12, 16-way available in 1RU chassis 24-way available in 2RU 32, 64-way available in 3RU
-----------	---

Note: for 12-way and above, please consult the factory for performance.

#### Frequency

Reference (ISRxxP);	10MHz
IF (IS/CLxxP);	50-180MHz
L-Band (IS/CLxxP);	850-2150MHz
Insertion loss	8 to 16dB ±1dB nom. (dependent upon 'ways')
Gain flatness	±0.25dB across full L-Band range ±0.1dB across any 40MHz

#### RF input power

Isolation	25dB typ. (between any two output ports)
Input return loss	14dB
Output return loss	20dB

### Interface Connections

Reference/IF;	BNC (f), 50Ω
L-Band;	SMA (f), 50Ω
Option 1a;	BNC (f), 50Ω
Option 1b;	N-Type (f), 50Ω
Option 1c/ 1d;	BNC (f), 75Ω

Note: can increase chassis size; up to 8-way in 1RU, 16-way in 2RU etc.

### Splitter (Input)/ Combiner (Output) 'Monitor' (Option 2a, 2b)

Connected directly to front panel (Option 2a) or rear panel (Option 2b) to provide an appropriately terminated monitor port.

Level	-20dBc ±3dB
-------	-------------

Note: connection type and impedance offered will be identical to the main rear panel interfaces, unless otherwise requested.

### Splitter Output 'Monitor' (Option 2c)

One splitter output connected directly to front panel to provide an appropriately terminated monitor port.

Note: connection type, impedance and level offered will be identical to the main rear panel interfaces, unless otherwise requested.

### BUC/ BDC/ LNB Powering (Option 3a)

Provides power to BUC via combiner L-Band output (Tx systems) or to BDC/ LNB via splitter L-Band input (Rx systems).

Voltage	+17 to +24VDC (factory settable)
Current	500mA typical
Control	On/ off switching via rear panel

Notes: for other power, connection or level configurations, please consult the factory. This option degrades gain flatness across the full band performance by approximately ±0.25dB.

### BUC/ BDC/ LNB external referencing (Option 3b)

Provides external reference to BUC via combiner L-Band output (Tx systems) or to BDC/ LNB via splitter L-Band input (Rx systems).

#### External reference input;

Frequency	10MHz (5MHz factory settable)
Level	0dBm ±3dB nom
Connector	SMA (f), 50Ωm

Note: for other external reference connections, level configurations or for internal automatic 'back-up' reference generation, please consult the factory.

### DC & 10MHz pass-through for BUC/ BDC/ LNB Powering (Option 3c, d)

Option 3c; provides DC power and 10MHz reference pass-through to BUC via combiner channel 1 input to common output (Tx systems) or to BDC/ LNB via splitter channel 1 output to common input (Rx systems).

Option 3d; as above, except required channel is externally 'patched' back into the unit for 'flexible' DC & 10MHz multiplexing.

Voltage	+17 to +24VDC typically
---------	-------------------------

Current	1A max
---------	--------

Note: for other power level configurations, please consult the factory. These options degrade gain flatness across the full band by approximately ±0.25dB.

### Redundant Amplifiers (Option 4)

Provides internal 1+1 redundancy for 'active' splitter/ combiner amplifiers

Control Auto selection & manual switch-over via rear panel

### DC Blocking (Option 8)

Provides DC blocking facility for combiner inputs or splitter outputs

### Variable L-Band Attenuation (Option 10)

Attenuation range	30dB
Control	Local, continuously variable from front panel

Notes: attenuator typically fitted to common input (splitter) or output (combiner). Can degrade gain flatness performance.

### Slope compensation (Option 15)

Provides linear positive slope compensation of nominally 5dB across the full L-Band range (950-2150MHz) to compensate for internal circuitry & external primarily cross-site L-Band cables.

Note: unit options chosen will determine 'surplus' available for external compensation (for details contact factory).

### Mechanical

Width	19", standard rack mount
Height	Typically up to 16-way in 1U (1.75"), up to 24-way in 2RU (3.5"), up to 64-way in 3RU (5.25")

Note: size is option dependent, for details please consult the factory.

Depth	200 to 400mm (option dependent), plus connectors
Construction	Aluminium chassis
Weight	Approx. 2kgs (4.5lbs)

### Environmental

Operating temp	0°C to +50°C
EMC	EN55022 part B & EN50082-1
Safety	EN60950

### Power supply (active versions only)

Voltage	90-264VAC
Frequency	47-63Hz
Power	30 Watts max.
Option 7;	Redundant PSU; provides a 1+1 redundant power supply configuration with separate prime power inputs

### Control System Interface (active versions only)


Discrete 'alarms interface'	PSU failure
Connection	Amplifier current detection
	D-Type, 15-way

### Options

- 1a) BNC (f), 50Ω connections
- 1b) N-Type (f), 50Ω connections
- 1c) BNC (f), 75Ω connections (passive units)
- 1d) BNC (f), 75Ω connections (active units)
- 2a) Splitter (input)/ combiner (output) front panel monitor port
- 2b) Splitter (input)/ combiner (output) rear panel monitor port
- 2c) Splitter output front panel monitor port
- 3a) BUC/ BDC/ LNB DC powering (switchable)
- 3b) BUC/ BDC/ LNB external referencing
- 3c) DC & 10MHz pass-through for BUC/ BDC/ LNB drive
- 3d) DC & 10MHz pass-through for BUC/BDC/LNB drive via rear panel 'patch' cable
- 4) Redundant amplifiers (active versions only)
- 5) Spare port terminations.
- 7) Redundant power supplies
- 8) DC blocking for combiner inputs or splitter outputs
- 10) Manual variable attenuator, 30dB at L-Band
- 15) 5dB slope compensation (L-Band only)

Note: the addition of options can modify the typical specification, for details please consult the factory

## Rear Panel View (16-way, L-Band, active combiner shown)

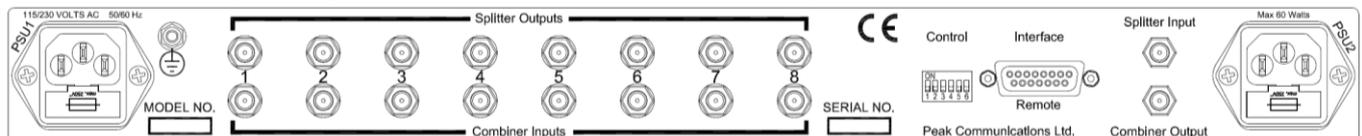

Peak Communications reserves the right to alter the specifications of this equipment without prior notice. ISL,ICL-181218.

Peak Communications Ltd., Unit 1, The Woodvale Centre, Woodvale Road, Brighouse, West Yorkshire, HD6 4AB, U.K.

Tel; +44 (0)1484 714200 Sales; +44 (0)1484 714229 Fax; +44 (0)1484 723666 Email; [sales@peakcom.co.uk](mailto:sales@peakcom.co.uk) Web; [www.peakcom.co.uk](http://www.peakcom.co.uk)