

EDGEPROBE ADVANCED



RF, ASI, IP Monitoring

THE IDEAL TOOL FOR ACCURATE & COST-EFFECTIVE MONITORING OF THE QUALITY OF DTV DISTRIBUTION OVER SATELLITE LINKS.



Combined with a Network Monitoring System or not, the EdgeProbe Advanced provides a powerful network alert & diagnosis tool allowing DTV network operators to monitor global trends and anticipate potential failures. EdgeProbe Advanced provides monitoring of the signal at different levels:

- RF satellite distribution: measures key RF signal parameters (Level, CNR, Eb/NO, link margin, BER) and indicates the modulation parameters
- MPEG-2 TS: checks the ETSI TR 101 290 (Priority 1, 2 & 3) conformance and provides optional Quality of Service indicators (Service Availability, Service Degradation)
- T2-MI: checks the distribution link at L1 pre & post signaling level
- OneBeam/SingleIllumination: checks the T2-MI marker and In-Band specific PIDs

APPLICATIONS

- 24/7 Monitoring and Maintenance of both Uplink and Downlink sites (RF & Baseband)
- Generation of Service Availability reports for Service Level Agreements
- Gateway from RF to ASI or IP
- Live transmission recorder

Monitor DVB-S & DVB-S2 signals at uplink/downlink through the RF inputs (up to 4 in 1RU)

Signal Level, CNR, Eb/NO, Link Margin, BER, modulation parameters

Multistream support, PLS support

LNB powering & configuration

Frequency range (L-band after LNB down conversion): 950 to 2150 MHz

DVB-S, DVB-S2; C-band, Ku-band, Ka-band

BENEFITS

- Standalone, easy to use and configure, fast deployment, SNMP compatible
- Increase customer satisfaction by detecting & preventing DTV network degradations before your customers do
- Reduce site maintenance cost by anticipating and identifying issues
- Detect Satellite Distribution issues before it affects the whole network
- Plan and improve the network configuration by identifying global trends
- Remotely accessible, compatible with low bandwidth control networks (GPRS/3G/4G)
- Low power consumption 25W

Baseband monitoring and TS forward over ASI/IP output

Monitor TS & T2-MI & BTS baseband distribution links at Head-End output and TX site input through the ASI and IP inputs (up to 4 in 1RU)

Forward the demodulated analyzed TS over ASI or IP output (T2-MI PLP extraction support)

VLAN support on the IP Data link

Complete MPEG-2 TS Monitoring

ETSI TR 101 290 Priority 1, 2, 3

QoS indicators (optional): Service Availability Error & Service Degradation Error

Verify Regionalization: Service Plan view, PID/Service presence, Scrambling

Service & components bitrates

Transcoding solution for confidence monitoring

Coupled with a TRANSBOX device, EdgeProbe can provide service transcoding and forward to third-party analysis systems

Controlled by the EdgeProbe, the TRANSBOX performs:

- Service extraction from the input MPEG-2 TS (SPTS or MPTS)
- Real-time audio/video transcoding: 1 to 10 Mbps output bitrate
- Transcoded MPEG-2 SPTS forward over IP Data

Internal GNSS receiver & Dual PSU - Hardware options

Internal GNSS: GPS & GLONASS support, for internal 1PPS reference signal generation

Dual Power Supply: one additional Power Supply can be installed on the equipment in order to ensure the power redundancy

T2-MI & OneBeam Monitor

ETSI TR 101 290 T2-MI packet alarms

T2 L1 pre/post signaling

T2-MI PLP TS analysis and extraction support

OneBeam: T2-MI marker and In-Band PID monitoring

32 GB of internal storage (up to 4 in 1RU)

Alarm logs up to 6 months

RF parameter trends up to 6 months


TS recording: manual, remote trigger

Compatible with all Network Monitoring Systems

Powerful network alert & diagnosis tool: monitor global trends and anticipate potential failures

Compatible SNMP v2c and v2c INFORM for alarming and device configuration

Web GUI access: support of low bandwidth Internet connection (3G, GPRS/4G)

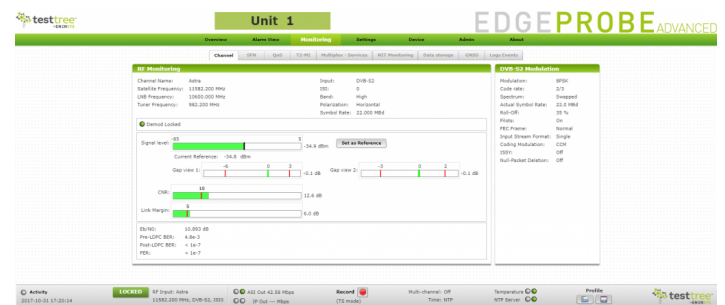

INTERFACES

| | |
|-----------------------|---|
| RF | * |
| Connector In | Up to 4x RF inputs (F-type female – 75 Ω) (LNB power & control) |
| Standards | DVB-S, DVB-S2 |
| Frequency range | 950 to 2150 MHz (after LNB down conversion) |
| Baseband TS | Up to 4x ASI in/out (BNC-type female – 75 Ω) Up to 4x Gigabit Ethernet for Data in/out (VLAN support) |
| GNSS & Time Reference | 1x GNSS antenna input (SMA-type – 50 Ω) (GPS/GLONASS) HW option, 3.3V antenna power up 1x 1PPS input (BNC-type female – 50 Ω) 1x 10MHz input (BNC-type female – 50 Ω) |

PHYSICAL

| |
|--|
| Height: 45 mm / 1.7 in, Width: 440 mm / 17.3 in, Depth: 300 mm / 11.8 in |
| Format: 1 RU, width 19", Power supply: 100-240 VAC +/-10% |
| Power consumption: 25W, Redundant Power Supply (HW option) |

ENVIRONMENT

| | |
|-----------------|----------------------------|
| Operating temp. | -20 to 55°C / -4 to 131 °F |
| Storage temp. | -20 to 70°C / -4 to 158°F |
| Humidity | 0 to 95%, non condensing |

MODCOD

| | |
|--------------|--|
| DVB-S | QPSK, code rates: 1/2, 2/3, 3/4, 5/6, 7/8 |
| DVB-S2 | CCM, VCM and ACM modes supported, roll-off: 15%, 20%, 25%, 35% QPSK code rates: 1/4, 1/3, 2/5, 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 8PSK code rates: 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK code rates: 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 32APSK code rates: 3/4, 4/5, 5/6, 8/9, 9/10 |
| Symbol rates | DVB-S 65Msps QPSK DVB-S2 65Msps QPSK, 60Msps 8PSK, 45Msps 16APSK |

MONITORING FEATURES

| | |
|-----------------------------|--|
| RF Monitor | * |
| Demodulation status | Lock / Unlock |
| Signal level | -95 to -5 dBm (0.1 dBm resolution, ±2 dBm accuracy) |
| CNR | -3 to 40 dB (0.1 dB resolution, ±0.3 dB accuracy) |
| BER | DVB-S: Pre-Viterbi, Post-Viterbi DVB-S2: Pre-LDPC, Post-LDPC, PER |
| * | Eb/NO, link margin, modulation parameters MultiStream support, PLS support |
| T2-MI Monitor | ETSI TR 101 290 T2-MI packet, L1 pre/post signaling PLP extraction and TS PLP analysis |
| OneBeam/Single Illumination | Monitoring of specific PID from the DTH stream used to recover the T2-MI distribution on TX site: T2-MI marker, In-Band |
| TS Monitor Base | ETSI TR 101 290 Priority 1 and 2 |
| TS Monitor Advanced | ETSI TR 101 290 Priority 3 |
| QoS Monitor | ETSI TR 101 290 SAE, SDE |
| Service Plan Monitor | Verify regional services, Service & PID bitrates, Scrambling, Service & PID presence |
| Scanning | Monitor sequentially multiple channel frequencies or PLPs |
| Extended Memory | Up to 4x32 GB of internal storage: event logs up to 6 months, trends up to 6 months, TS recording |
| TRANSBOX | Coupled with a TRANSBOX device, EdgeProbe can provide service transcoding and forward to third-party analysis systems: service extraction from the input TS (SPTS or MPTS), real-time audio/video transcoding: 1 to 10 Mbps output bitrate, transcoded SPTS forward over IP Data |

ORDERING CODES

EdgeProbe Advanced DVB-S/S2

DVB-S/S2 Advanced Monitoring Probe

| | |
|-----------------|---|
| <i>Included</i> | RF Monitor TS monitoring over ASI/IP Input, TS forward over ASI/IP Output |
| <i>Options</i> | TS Base Monitor : ETR 101 290 Priority 1, 2 TS Advanced Monitor : ETR 101 290 Priority 3, SAE/SDE T2-MI Monitor : ETR 101 290 T2-MI, T2-MI L1, PLP extraction Service Plan : Service/PID parsing, bitrates, presence detection Extended Memory : 32 GB internal storage for logs, trends, TS records Dual ADV : Add a second monitoring unit, total of 2x (RF in, ASI in/out, IP DATA in/out) One Beam Monitor : T2-MI marker and In-band PIDs monitoring Scanning : Round-robin monitoring of more than one channel (RF frequency, TS over ASI/IP in) Internal GNSS HW : GPS/GLONASS internal receiver generating internal 1PPS reference Dual Power Supply HW : Additional power supply for redundancy Quad ADV HW : Add three monitoring units, total of 4x (RF in, ASI in/out, IP DATA in/out) |

sales@test-tree.com

www.test-tree.com